

Z-LINE

TEMPORARY STATIC LINE



AZP0WX3/20 AZP0WX3/30

The ZERO® Z-Line temporary static line is an adjustable lifeline system that requires connection between structural anchor points with a minimal static resistance 18kN (1 person), 20kN (2 persons), 22kN (3 persons).

Ideal for construction, roofing industry, open trenches, scaffolders the Z-Line is completed with a heavy-duty transport bag.

RATING: 15kN

LIFESPAN: Up to 10 Years

CERTIFICATION:

EN 795: 2012 Class B


EN 795:2012 Class B, Personal fall protection equipment. Anchor devices



MODEL	DIMENSIONS	WEIGHT (G)	MATERIAL	RATING (KG)
AZP0WX3/20	20m	5.2kg	Polyester Webbing	15kN
AZP0WX3/30	30m	6.4kg		

PRODUCT FEATURES

- Protection for up to three users.
- Zinc plated and powder coated tensioner.
- 35mm polyester webbing with snap-lock connectors.
- 30m overall maximum length.
- Supplied with Kit Bag.

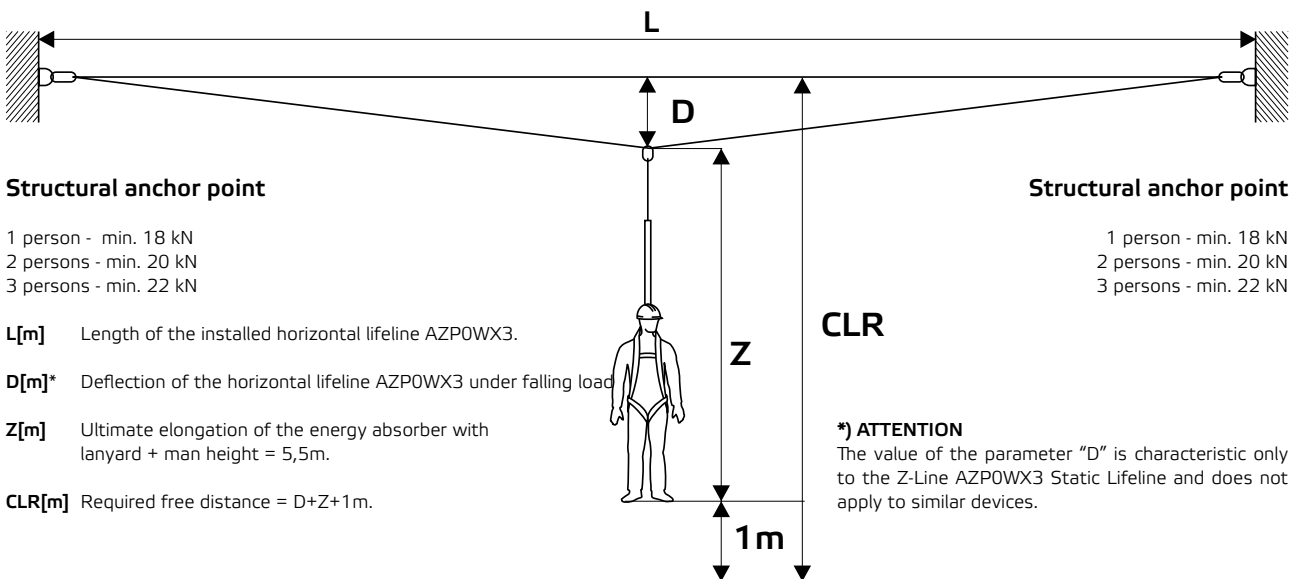

ZERO HEIGHT SAFETY LIMITED

AUSTRALASIA
10 Holt Place, Harewood,
Christchurch 8053, New Zealand
sales.nz@zeroheightsafety.com

EUROPE & UK
Badenerstrasse 122,
5466 Kaiserstuhl, Switzerland
sales.eu@zeroheightsafety.com

