

## COLOURS/ DESIGNS



Black

## APPLICATIONS

- Ideal for lining ute decks, vans, trucks, work benches, factory floors, boats

## FEATURES

- Approx. 10mm thick
- Multipurpose safety matting on a roll
- Anti-slip textured top
- Heavy duty rubber construction
- Outdoor use



Drainage



Outdoor Use




Custom Sizes Available



Approx. Thickness

\*Guaranteed against failure from manufacturing defects

PROPERTIES	MEASURED CHARACTERISTICS	VALUE	STANDARD
<b>MATERIAL</b>			
	Polymer	Natural Rubber	
	Colour	Black	
	Standard Sizes (mm)	See page 2.	
	Surface Finish	Textured blocks with holes	
	Backing Finish	Cleated	
<b>MECHANICAL</b>			
	Hardness	50 Shore A	
	Specific Gravity	1.50gm/cm <sup>3</sup>	
	Tensile Strength (min)	3 mpa	
<b>TEMPERATURE</b>			
	Temperature Range	-10°C to +70°C	
<b>CHEMICAL RESISTANCE</b>			
	Petrol & Oil	●	
	Ozone & Weather	●	
	Flame Resistance	●	
	Animal & Vegetable Oil	●	
	Wear Resistance	●	
	Acid Resistance	●	
	Alkali Resistance	●	
<b>KEY:</b>			
	● POOR	● FAIR	● EXCELLENT

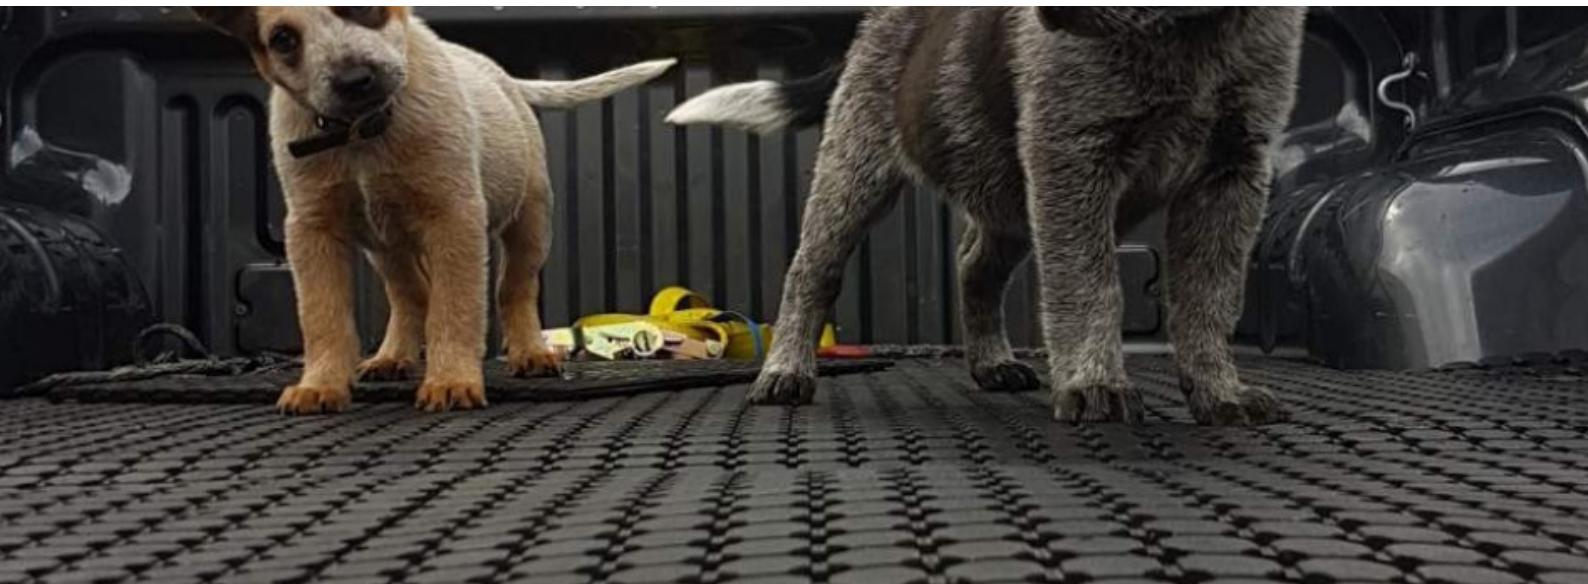

THICKNESS (MM)	WIDTH (MM)	ROLL LENGTH (M)	ROLL WEIGHT (KG/M)
10	1500	9	12
10	1800	10	15.2

\*Sizes vary  $\pm$  2%

